


## Instruction: How To Add Stop Ball

- 1) Cut or untie the knots right under all tassels of the Lifting Cords.  
Keep the tassels.




- 2) Remove clear plastic rings (simply untie them)




- 3) Insert all lifting cords into a stop ball



- 4) Grab all cords and tie a knot as shown in the pictures below. The position of the knot should be in the middle between the top slat and the second slat.

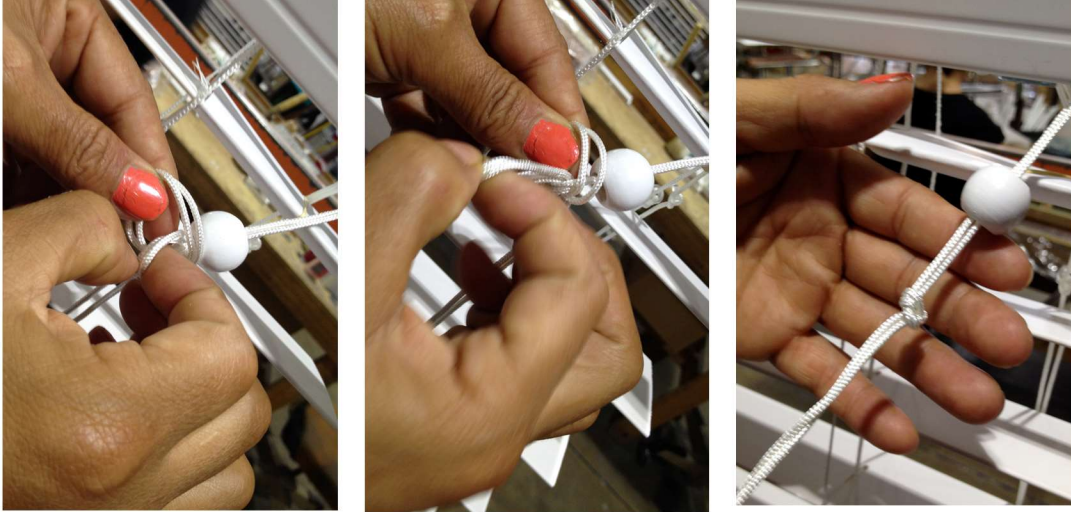

- 5) If there are 2 lifting cords, cut one cord as shown below and leave one cord.  
If there are 3 or 4 lifting cords, always leave 2 cords.

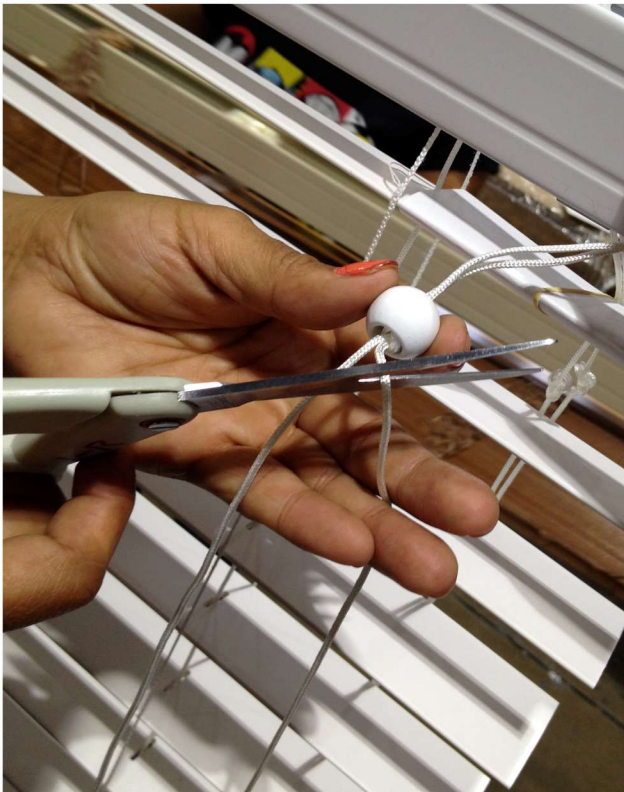

6) Slide the cord back into a tassel(s) and tie a knot(s)

